

Supplementary materials

Effects of Graphene-Based Fillers on Cathodic Delamination and Abrasion Resistance of Cathaphoretic Organic Coatings

Massimo Calovi ¹, Stefano Rossi ¹, Flavio Deflorian ^{1,*}, Sandra Dirè ¹, Riccardo Ceccato ¹, Xiaolei Guo ² and Gerald S. Frankel ²

¹ Department of Industrial Engineering, University of Trento, Via Sommarive 9, 38123 Trento, Italy; massimo.calovi@unitn.it (M.C.); stefano.rossi@unitn.it (S.R.); sandra.dire@unitn.it (S.D.); riccardo.ceccato@unitn.it (R.C.)

² Fontana Corrosion Center, The Ohio State University, Columbus, OH 43210, USA; guo.237@osu.edu (X.G.); frankel.10@osu.edu (G.F.)

* Correspondence: flavio.deflorian@unitn.it; Tel.: +39-0461-282442

Received: 12 June 2020; Accepted: 23 June 2020; Published: date

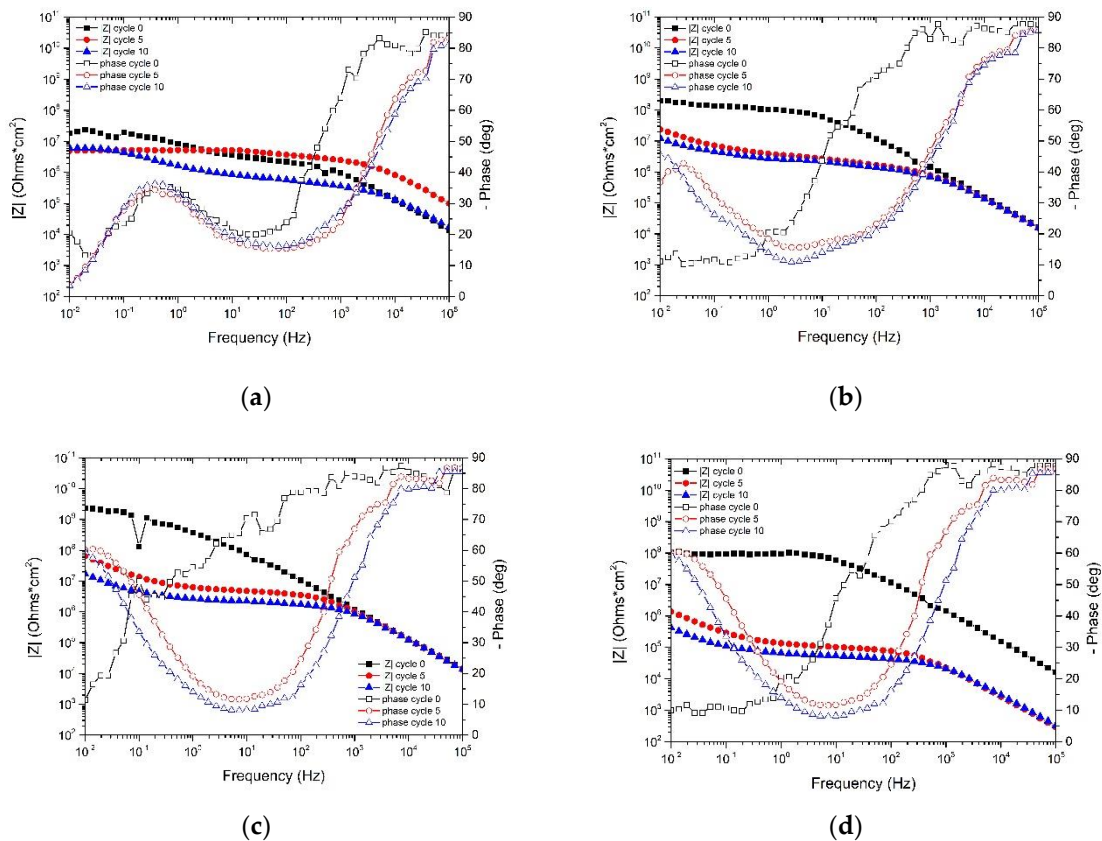


Figure S1. EIS Bode modulus and phase diagrams of (a) sample g-0; (b) sample g-0.1; (c) sample g-0.2 and (d) sample g-0.5, during the AC-DC-AC measurements.

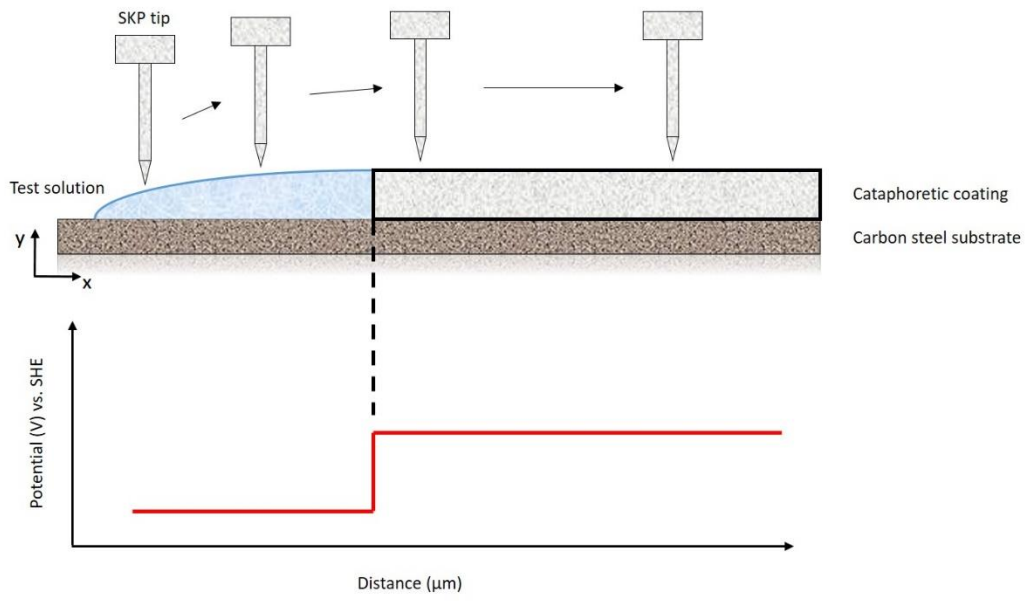


Figure S2. Working principle of the SKP equipment.