eng

MDPI

Article

Recalibrated Correlations between Dynamic Cone Penetrometer (DCP) Data and California Bearing Ratio (CBR) in Subgrade Soil

Jirawat Chokkerd [1], Artit Udomchai [2], Sivarit Sultornsanee [3], Niwat Angkawisittpan [4], Piyanat Jantosut [1], Noppadol Sangiamsak [1] and Nopanom Kaewhanam [1,*]

[1] Department of Civil Engineering, Faculty of Engineering, Mahasarakham University, Maha Sarakham 44150, Thailand; jirawat.c@msu.ac.th (J.C.); piyanat.j@msu.ac.th (P.J.); noppadol.s@msu.ac.th (N.S.)
[2] School of Civil Engineering, Suranaree University of Technology, Nakhon Ratchasima 30000, Thailand; artit.u@g.sut.ac.th
[3] College of Engineering, Northeastern University, Boston, MA 02115, USA; s.sultornsanee@northeastern.edu
[4] Research Unit for Electrical and Computer Engineering Technology (RECENT), Faculty of Engineering, Mahasarakham University, Maha Sarakham 44150, Thailand; niwat.a@msu.ac.th
* Correspondence: nopanom.k@msu.ac.th

Abstract: This study investigates the correlation between the California Bearing Ratio (CBR) and the Dynamic Cone Penetrometer (DCP) for subgrade soil analysis. The paper aims to provide practical equations for predicting CBR values from DCP test results, therefore enhancing the efficiency of soil assessments in engineering practice. By analyzing test data and proposing correlations for different soil groups, the study introduces recalibrated correlations that demonstrate high accuracy in predicting CBR values. The newly proposed equations offer reliable predictions with R^2 values of 0.89, 0.92, and 0.94 for clean sand, silty sand or sandy silt, and cohesive soil, respectively. These correlations serve as valuable tools for engineers, enabling rapid and accurate CBR estimations for improved decision-making in various engineering projects.

Keywords: California Bearing Ratio; CBR; Dynamic Cone Penetrometer; DCP; estimation; prediction; subgrade; sand; soil; cheap and fast

check for updates

Citation: Chokkerd, J.; Udomchai, A.; Sultornsanee, S.; Angkawisittpan, N.; Jantosut, P.; Sangiamsak, N.; Kaewhanam, N. Recalibrated Correlations between Dynamic Cone Penetrometer (DCP) Data and California Bearing Ratio (CBR) in Subgrade Soil. *Eng* **2024**, *5*, 1173–1182. https://doi.org/10.3390/eng5030064

Academic Editor: Manoj Khandelwal

Received: 21 May 2024
Revised: 20 June 2024
Accepted: 24 June 2024
Published: 26 June 2024

Copyright: © 2024 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).

1. Introduction

The California Bearing Ratio (CBR) is one of the most important characteristics representing the shear strength of subgrade material in pavement structures. To conduct the CBR test, samples must be transported from the borrow pit, prepared, compacted, and soaked in the laboratory, and then penetrated with CBR equipment. Consequently, a truly representative CBR value is difficult to obtain because it takes a long time and is not readily determined in the field. In addition, civil engineers are often faced with the urgent need for the CBR of soil in a short amount of time. A survey of large amounts of material resources for road construction is a good example. Therefore, in the literature, a number of correlations between CBR and other strength properties of soil, such as density, unconfined compressive strength, and DCP, have been established [1–35]. Among these techniques, one of the tests that can provide a highly reliable correlation with the CBR is the Dynamic Cone Penetration (DCP) test [3,4,13,14,17–29,35]. In addition, a CBR prediction from multivariate data analysis and/or method of neural network can also provide highly reliable results [36–42]. However, the multivariate data analysis and neural network method always require input soil parameters that are not already determined in the field. Therefore, DCP equipment, which is considered compact, accurate, and lightweight, is a powerful tool to achieve an efficient onsite correlation between CBR and DCP.

The correlations between CBR and DCP for local materials proposed by many researchers are usually in the form of logarithmic equations, as summarized in Table 1, and the trends of all graphs are depicted in Figure 1. According to the equations in Table 1, a

typical form of the DCP–CBR equation can be expressed as shown in Equation (1), where α and β are the fitting parameters. Using the same form of equation, all graphs have the same tendency. It should be noted that when DCP reaches approximately 30 mm/blow, the CBR varies in a narrow range, around approximately 6%. Furthermore, a wide possible range of CBR was found when DCP was less than 30 mm/blow. For instance, when DCP is 10 mm/blow, the possible value of CBR can be approximately 13–32%. In this situation, it is very difficult for engineers to make decisions when selecting the proper CBR. In addition, inconsistency was found in the literature. Wilcesh et al. (2018) [19] reported a single equation that predicted well for various groups of soil (USCS system), i.e., SC, ML, MH, CL, and CH for DCP ranging between 20 and 120 mm/blow. On the other hand, it was revealed from the test data for soil type SM, SP, SP–SM, ML, and CL (USCS system) obtained by Al-Refeai and Al-Suhaibani (1996) [17] that the correlations could predict well for some groups of soil but the data points for all groups of soil were scattered. However, consistency was found from the test results of Feleke and Araya (2016) [18] and the soil type CL of Al-Refeai and Al-Suhaibani (1996) [17]. It was evident that what was available was not enough. However, this was due to the existing test data, which was used to obtain reliable correlations for CBR predictions for general purposes.

Table 1. Existing correlation between CBR and DCP.

Equation No.	Correlation CBR (%), DCP (mm/Blow)	Researchers
1	$Log(CBR) = 2.494 - 1.0672Log(DCP)$	Al-Refeai, Al-Suhaibani (1996) [17]
2	$Log(CBR) = 2.015 - 0.906Log(DCP)$	Feleke & Araya (2016) [18]
3	$Log(CBR) = \frac{112.03}{DCP^{0.808}}$	Wilcesh et al. (2018) [19]
4	$Log(CBR) = 2.81 - 1.32Log(DCP)$	Harrison (1986) [20]
5	$Log(CBR) = 2.20 - 0.71Log(DCP)^{1.5}$	Livneh (1989) [21]
6	$Log(CBR) = 2.465 - 1.12Log(DCP)$	U.S. Army Corps of Engineers (1992) [22]
7	$Log(CBR) = 2.48 - 1.057Log(DCP)$	TRL [23]
8	$Log(CBR) = 2.954 - 1.496Log(DCP)$	Yitagesu (2012) [24]
9	$Log(CBR) = 0.84 - 1.26Log(DCP)$	IDOT (1997) [25]

TRL denotes Transport Research Laboratory, Huntingdon, UK; IDOT denotes Illinois Department of Transportation, US.

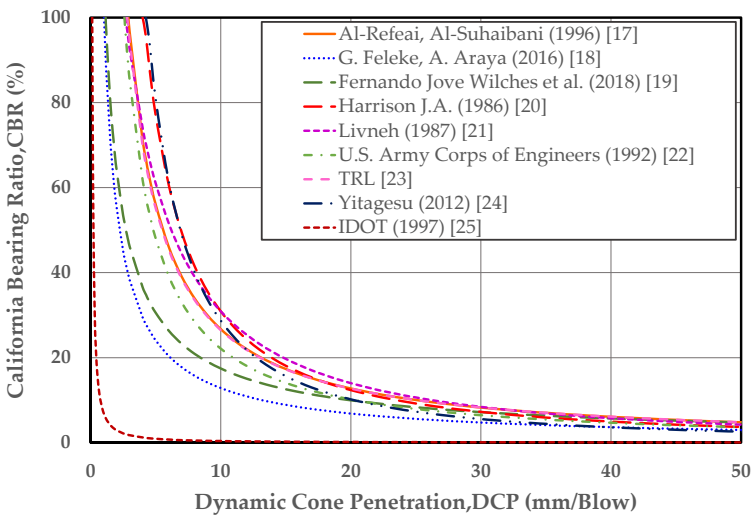

Figure 1. Graphs of the existing correlation between CBR and DCP.

In this paper, the existing test data for various soil types were investigated, and the correlations were recalibrated. Four distinct sets of test results (three existing test results [17–19] and one additional set from this study) were used in the analyses. The

coefficient of determination (R^2) was used to evaluate the proposed correlations. Useful recommendations were also provided for practical application with no additional testing.

$$Log(CBR) = \alpha - \beta \cdot Log(DCP) \quad (1)$$

2. Materials and Methods

To recalibrate the existing correlations between CBR and DCP, the test results of soils from many regions and soil groups are required. As mentioned earlier, three existing test results [17–19] were included in the analyses, with one extra test result from five provinces in northeast Thailand. Figure 2 shows the location map for material resources in northeast Thailand. The three existing soil testing datasets [17–19] are not repeated here. On the other hand, soil data from tests conducted in Thailand are shown in Table 2.

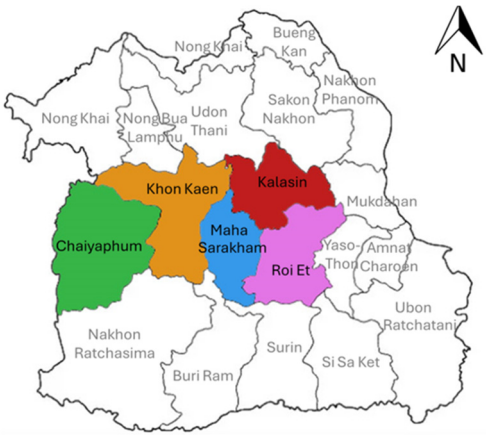

Figure 2. Location map for local material from five provinces of northeast Thailand (Chaiyaphom, Khon Kaen, Maha Sarakham, Kalasin, and Roi Et).

Table 2. Basic soil test properties of soil in northeast Thailand.

Sample No.	LL (%)	PI (%)	G_s	Soil Classification	
				AASHTO	USCS
1	18.27	5.54	2.69	A-2-4	SC–SM
2	24.50	13.21	2.67	A-2-6	SC
3	15.99	4.51	2.65	A-2-4	SC–SM
4	17.43	9.04	2.65	A-2-4	SC
5	19.27	9.75	2.67	A-2-4	SC
6	20.12	11.15	2.65	A-2-6	SC
7	19.50	15.48	2.66	A-2-6	SC
8	18.02	9.57	2.68	A-2-4	SC
9	21.89	16.44	2.63	A-2-6	SC
10	15.78	10.84	2.67	A-2-6	SC
11	20.56	8.86	2.67	A-2-4	SC
12	27.56	20.04	2.66	A-2-6	SC
13	19.95	8.22	2.64	A-2-4	SC
14	23.21	14.61	2.63	A-2-6	SC
15	18.27	6.08	2.62	A-2-4	SC–SM
16	20.32	14.69	2.65	A-2-4	SC
17	19.81	14.92	2.66	A-2-4	SC
18	17.23	10.98	2.68	A-2-6	SC
19	16.72	5.56	2.63	A-2-4	SC–SM
20	17.25	6.12	2.62	A-2-4	SC–SM
21	18.33	11.23	2.64	A-2-4	SC

According to Table 2, most soils are classified as clayey sand (SC), and some of the samples are silty–clayey sand (SC–SM) in the USCS system, while soils are classified as A-2 group in the AASHTO system for all samples.

CBR and DCP testing are two significant tests in addition to the testing of basic properties. The standard for conducting the CBR and DCP were ASTM D1883-21 and ASTM D6951/D6951M-18, respectively. The CBR test method involves several key steps to determine the strength of a soil sample. The soil sample is initially passed through a 19-millimeter sieve. The portion passing through the sieve is used for testing, while the retained soil is replaced with an equal amount of fresh soil. Samples of 6.8 kg are prepared. Compaction is performed to achieve maximum dry densities specific to each specimen. Each specimen is mixed with water to achieve its optimum moisture content (OMC). The soil is compacted in the mold in five layers, with each layer being compacted thoroughly. The number of rammer blows is 56 blows/layer. After compaction, the weight of the mold and compacted soil is measured. In the loading step, the mold with the specimen is placed in a compression testing machine (CTM) under a surcharge load of 4.54 kg. The CTM is operated at a controlled rate of penetration (1.25 mm/minute). During the test, the penetration of the piston into the soil and the corresponding load applied are measured using a dial gauge and a proving ring, respectively. The load applied at various levels of penetration is recorded.

A steel rod with a 60-degree conical tip and a diameter of 20 mm makes up the DCP apparatus. An anvil attached to a second steel rod sits above the rod. This rod serves as a guide so that an 8-kilogram hammer may be raised and lowered from a height of 57.5 cm on several occasions. The anvil is used as the connecting point between the two rods to provide rapid couplings and effective energy transmission from the falling weight to the penetrating rod. After the test gear is put up, the DCP is set up at the test site, and a zeroing scale is created by recording the rod's initial penetration. The weight is hoisted to the top of the rod, 57.5 cm above the anvil, and then dropped while the rod is held vertically. Following each drop, the rod's penetration is measured. To avoid soil binding and the penetration rod affecting test findings, the rod may be gently rotated in cohesive soils. If the target depth is attained or the rod penetrates less than 3.18 mm 10 drops, the test will be declared over. The DCP's dimensions are shown in Figure 3. The penetration depth (D) in millimeters per single drop of the hammer is the definition of the DCP value.

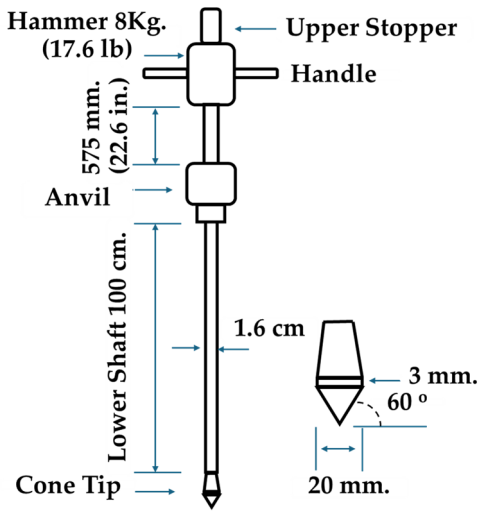

Figure 3. The dynamic cone penetrometer (DCP).

3. Results and Discussions

In this section, the results of both DCP and CBR testing from 21 soil samples in northeast Thailand are presented, and then the analyses for the correlation are described.

3.1. Test Results for Strength Parameters of Subgrade Soils

Prior to the test of CBR, a compaction test had to be performed to obtain the optimum moisture content (OMC) and the maximum dry density (MDD), which is required in the CBR testing procedure. Therefore, the results of DCP and CBR, as well as the MDD, are presented in this section. It is worth noting that MDD is one of the most effective factors that can provide a reliable correlation to the CBR. However, the process of MDD testing has a drawback in that it is time-consuming compared to the DCP test.

Table 3 summarizes the test results of the 21 soil samples in northeast Thailand. The relationship between the DCP and CBR is demonstrated in Figure 4. It is indicated from Table 3 that the DCP values range from 7 to 40 mm/blow, and it is observed that the tendency of the DCP–CBR is similar to those of the DCP–CBR presented in Figure 1. Using Equation (1), the best-fit parameters α and β for soil in northeast Thailand were evaluated, as shown in Equation (2) with R^2 of 0.94. Notably, although Equation (2) can predict well in northeast Thailand, there is no guarantee that the equation for local material is applicable to material in other regions. Therefore, a recalibration process is required and is described in the next section.

$$Log(CBR) = 2.58 - 1.18Log(DCP) \quad (2)$$

Table 3. Test results of 21 soil samples in northeast Thailand.

Sample No.	Soil Classification	MDD (g/cm^3)	DCP (mm/Blow)	CBR (%)
1	SC–SM	1.84	20.83	14.18
2	SC	1.79	13.10	12.92
3	SC–SM	1.71	31.25	5.32
4	SC	1.75	20.00	8.66
5	SC	1.74	25.00	8.13
6	SC	1.79	30.00	7.88
7	SC	1.89	16.67	15.44
8	SC	1.64	30.00	4.54
9	SC	1.76	10.70	21.42
10	SC	1.73	27.50	8.82
11	SC	1.78	22.00	11.50
12	SC	1.86	15.71	13.02
13	SC	1.94	12.50	20.37
14	SC	1.86	17.86	13.55
15	SC–SM	1.85	11.09	14.28
16	SC	1.76	30.64	8.65
17	SC	1.93	10.42	25.87
18	SC	1.70	33.33	5.25
19	SC–SM	1.95	8.93	30.36
20	SC–SM	1.94	7.35	35.46
21	SC	1.69	39.82	5.04

3.2. Recalibration of the Correlations

The recalibration process starts by investigating all test results of DCP–CBR from all types of soil. The data points extracted from [17–19], including from this study, are depicted in Figure 5 with the upper and lower bound lines. Data points can be divided into two ranges of DCP value: (1) DCP less than 30 mm/blow; and (2) DCP greater than 30 mm/blow. For DCP less than 30 mm/blow, CBR decreased with DCP, and the data points were scattered in a wide range. Within this range, it is impossible to determine a unique correlation. This confirmed that test results from local material could not be used in the CBR prediction without any special conditions. For DCP greater than 30 mm/blow, the CBR varied in a narrow range for all types of soil. Therefore, a unique correlation can be established. This agreed with the finding of Wilcesh et al. [19], who suggested a single equation for describing the DCP–CBR relationship in this range of DCP. In addition,

despite having the equation of Wilcesh et al. [19], a constant value of CBR of 6% is enough for the estimation of DCP greater than 30 mm/blow. Moreover, when trying to evaluate the existing correlations presented in Table 1 by four sets of test data, the finding showed that the equation proposed by Wilcesh et al. [19] provided the highest R^2 in three cases (i.e., Feleke & Araya (2016), Wilches et al. (2018) and the soil test in this paper), but gave low R^2 for data from Al-Refeai & Al-Suhaibani (1996). Table 4 summarizes the R^2 described above. The numbers in rectangles represent the considered low value of R^2.

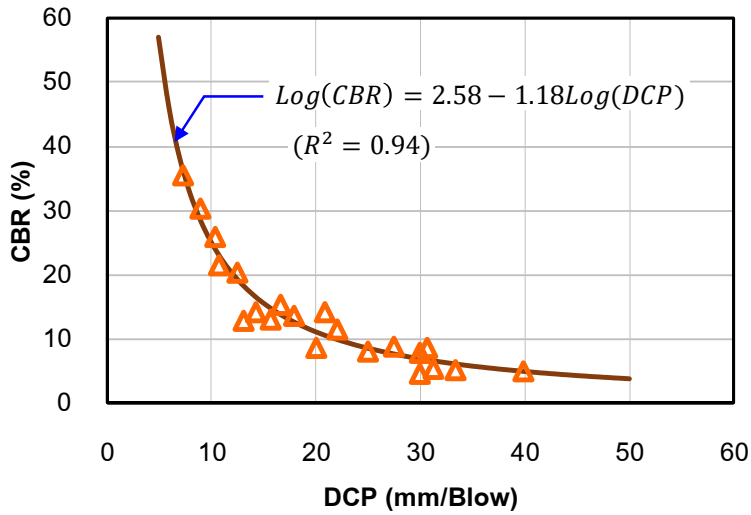

Figure 4. Relationship between the DCP and CBR of soil samples in northeast Thailand.

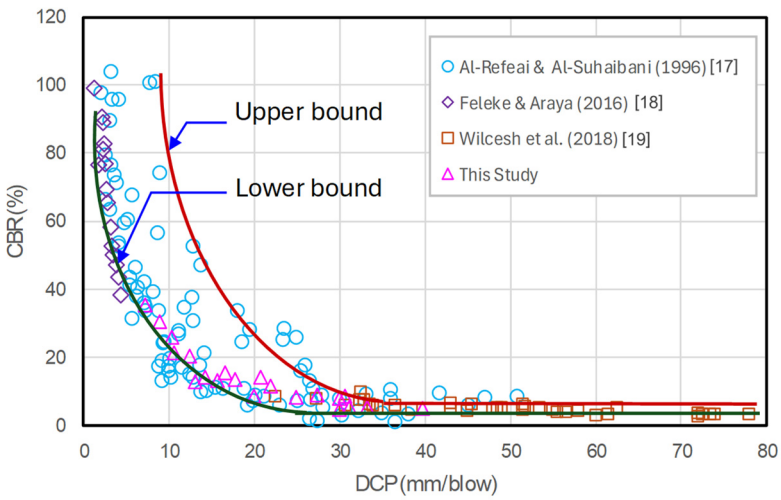

Figure 5. Data plot between the DCP and CBR of subgrade soils.

The special conditions for recalibration are addressed here. It should be kept in mind that no extra testing should be required, and the identifying procedure of soil samples during DCP testing by visual inspection should be enough in the case of the soil type involved. The special conditions added in the analyses are as follows:

(1) The proposed correlations should be in the form of Equation (1) and provide fewer changes or a constant value of CBR when DCP is greater than 30 mm/blow;
(2) The correlation should be separated for the cohesionless and cohesive soil;
(3) For cohesionless soil in which the data points were more scattered, the subgroup, such as clean sand or sand mixed with non-plastic silt (both silty sand and sandy silt), could be an important condition.

Table 4. Coefficient of determination (R^2) of Equations in Table 1 for various soil datasets.

Equation Number	Al-Refeai & Al-Suhaibani (1996) [17]	Feleke & Araya (2016) [18]	Wilches et al. (2018) [19]	This Study
1	0.82	0.45	0.96	0.97
2	0.59	0.85	0.83	0.77
3	0.78	0.92	0.97	0.91
4	0.43	0.00	0.92	0.93
5	0.85	0.74	0.93	0.92
6	0.82	0.67	0.92	0.97
7	0.83	0.51	0.96	0.97
8	0.09	0.00	0.81	0.95
9	0.03	0.06	0.02	0.03

TRL denotes Transport Research Laboratory, Huntingdon, UK; IDOT denotes Illinois Department of Transportation, US.

With these conditions, the proposed correlations can be derived in three subgroups, as shown in Equations (3)–(5) and Figure 6. In analyzing data using the aforementioned conditions, it was also assumed that soils in the same group should yield consistent results independently of the data source. However, it should be noted in grouping that there should be no additional tests to maintain the ease of practical application of the obtained equations. Therefore, SP and SP–SM were grouped as clean sand, SM, ML, and MH were grouped as silty sand or sandy silt, and SC and SC–SM were grouped as cohesive soil.

$$\text{Log(CBR)} = 3.47 - 1.68\log(\text{DCP}) \text{ (for soil SP, SP-SM)} \quad (3)$$

$$\text{Log(CBR)} = 2.53 - 1.13\log(\text{DCP}) \text{ (for soil SM, ML, MH)} \quad (4)$$

$$\text{Log(CBR)} = 2.32 - 1.03\log(\text{DCP}) \text{ (for soil SC, SC-SM)} \quad (5)$$

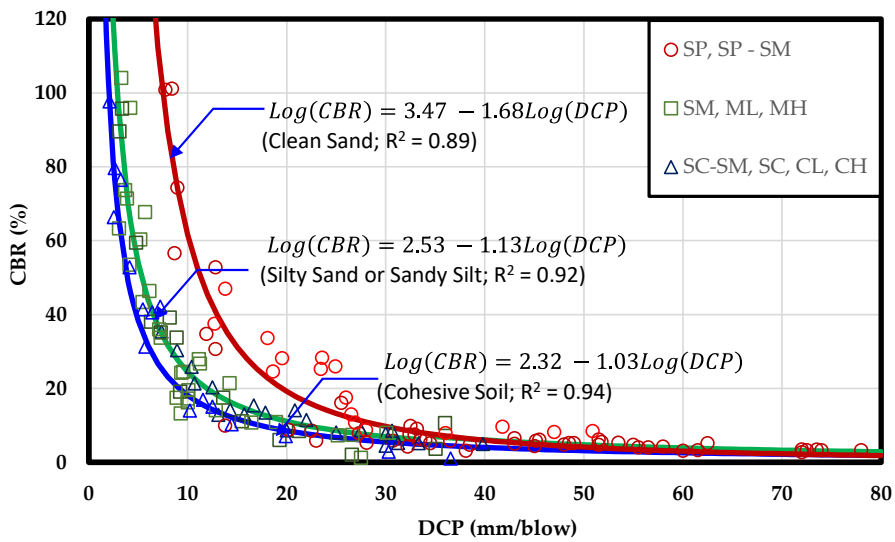

Figure 6. Graphs of new correlations proposed in this paper.

In Figure 6, data points representing soil groups SP, SP–SM, SM, ML, MH, SC, and SC–SM were plotted against the proposed correlations. These correlations were established based on the conditions mentioned earlier, yielding R^2 values of 0.89, 0.92, and 0.94 for clean sand, silty sand or sandy silt, and cohesive soil, respectively. With an R^2 of approximately 0.9, these correlations provided sufficient accuracy for rapid prediction. It was emphasized that visually inspecting the soil before applying the correlations was crucial. Engineers

could distinguish between clean sand and sand mixed with silt by observing the particle sizes. If the soil appeared predominantly sandy with visible particles, it was likely clean sand. However, if there were clearly visible portions of finer soil mixed in, it indicated a mixture of sand and silt. Additionally, if the soil exhibited cohesive properties or could be molded into threads when mixed with water, akin to the plastic limit (PL) test, it was classified as cohesive soil. Hence, visual inspection could be effectively combined with the new correlation method.

4. Conclusions

This study focuses on predicting the CBR from the DCP for subgrade soil. By analyzing test data and proposing correlations between CBR and DCP for different soil groups, the researchers aimed to provide simple and practical equations for accurately predicting CBR values in general engineering practice. The findings of the study highlight the importance of recalibrating the existing correlations to ensure applicability across different regions and emphasize the significance of visually inspecting soil characteristics before applying the proposed correlations. The newly proposed correlations demonstrated high accuracy with R^2 values of 0.89, 0.92, and 0.94 for clean sand, silty sand or sandy silt, and cohesive soil, respectively. These correlations offer a valuable tool for engineers to rapidly obtain CBR values, ultimately enhancing the efficiency and reliability of subgrade soil assessments in various engineering projects.

Furthermore, the authors advise future research on the application of multivariate data analysis and neural network modeling if more trustworthy findings in the prediction of CBR are needed and if testing for CBR values should not be rushed.

Author Contributions: Conceptualization, J.C., N.S. and N.K.; methodology, J.C. and N.K.; software, J.C.; validation, J.C., N.S. and N.K.; formal analysis, J.C.; investigation, J.C.; resources, J.C.; data curation, J.C.; writing—original draft preparation, J.C.; writing—review and editing, J.C., N.A., N.S. and N.K.; visualization, J.C., A.U., S.S., N.A., P.J., N.S. and N.K.; supervision, N.S. and N.K.; project administration, N.K.; funding acquisition, N.K. All authors have read and agreed to the published version of the manuscript.

Funding: This research was financially supported by Mahasarakham University, grant number 6717022/2567.

Data Availability Statement: The data presented in this study are available on request.

Acknowledgments: This research was supported by Mahasarakham University. The support is gratefully acknowledged.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Lines, S.; Williams, D.J.; Galindo-Torres, S.A.; Danyaya, H.A. Determination of Thermal Conductivity of Soil Using Standard Cone Penetration Test. In Proceedings of the 2nd International Conference on Advances on Clean Energy Research, Berlin, Germany, 7–9 April 2017.
2. Mukesh, A.P.; Patel, H.S.; Gautam Dadhich, E.F. Prediction of Subgrade Strength Parameters from Dynamic Cone Penetrometer Index, Modified Liquid Limit and Moisture Content. In Proceedings of the 2nd Conference of Transportation Research Group of India, Agra, India, 12–15 December 2013.
3. Mukesh, A.P.; Patel, H.S. Experimental Study to Correlate the Test Results of PBT, UCS, and CBR with DCP on Various soils in soaked condition. *IJE* **2012**, *6*, 244–261.
4. Mukesh, A.P.; Patel, H.S. Laboratory Assessment to Correlate Strength Parameter from Physical properties of Subgrade. In Proceedings of the Non-Circuit Branches of the 3rd Nirma University International Conference on Engineering, Ahmedabad, India, 6–8 December 2012.
5. Bayamack, J.F.N.; Onana, V.L.; Ndzié Mvindi, A.T.; Ze, A.N.; Ohandja, H.N.; Eko, R.M. Assessment of the determination of Californian Bearing Ratio of laterites with contrasted geotechnical properties from simple physical parameters. *Transp. Geotech.* **2012**, *19*, 84–95. [CrossRef]
6. Kumar, S.; Singh, D. Prediction of UCS and CBR behavior of fiber-reinforced municipal solid waste incinerator bottom ash composites using experimental and machine learning methods. *Constr. Build. Mater.* **2023**, *367*, 130230. [CrossRef]

7. Othman, K.; Abdelwahab, H. The application of deep neural networks for the prediction of California Bearing Ratio of road subgrade soil. *Ain Shams Eng. J.* **2023**, *14*, 101988. [CrossRef]
8. Nagaraj, H.B.; Suresh, M.R. Influence of clay mineralogy on the relationship of CBR of fine-grained soils with their index and engineering properties. *Transp. Geotech.* **2018**, *15*, 29–38. [CrossRef]
9. Rehman, Z.U.; Khalid, U.; Farooq, K.; Mujtaba, H. Prediction of CBR Value from Index Properties of different Soils. *IRJET* **2017**, *22*, 17–26.
10. Yildirim, B.; Gunaydin, O. Estimation of California bearing ratio by using soft computing systems. *Expert Syst. Appl.* **2011**, *30*, 6381–6391. [CrossRef]
11. Shirur, N.B.; Hiremath, S.G. Establishing Relationship between CBR Value and Physical Properties of Soil. *IOSR-JMCE* **2014**, *11*, 26–30. [CrossRef]
12. Priya, G.; Arya, K.S.; Manjummekudiyil, E.M.; Unni, A.; Menon, V.S. Prediction of CBR Value from Index Properties of Soil. *IRJET* **2019**, *6*, 4029–4033.
13. Perić, D.; Goh, G.; Saeidaskari, J.; Rashk Olia, A.S.; Ayar, P. Development of Prediction Models for Performance of Flexible Pavements in Kansas with Emphasis on the Effects of Subgrade and Unbound Layers. *Sustainability* **2022**, *14*, 9020. [CrossRef]
14. Baghbani, A.; Nguyen, M.D.; Alnedawi, A.; Milne, N.; Baumgartl, T.; Abuel-Naga, H. Improving Soil Stability with Alum Sludge: An AI-Enabled Approach for Accurate Prediction of California Bearing Ratio. *Appl. Sci.* **2023**, *13*, 4934. [CrossRef]
15. Bandara, N.; Hettiarachchi, H.; Jensen, E.; Binoy, T.H.; Perera, R. Using Kiln Dust to Improve Weak Subgrades for Pavement Construction: A Field Verification in Michigan, USA. *Geotechnics* **2023**, *3*, 179–192. [CrossRef]
16. Dafalla, M.; Shaker, A.; Al-Shamrani, M. Use of the Dynamic Cone Penetrometer in Compacted Clay–Sand Layers. *Appl. Sci.* **2022**, *12*, 11547. [CrossRef]
17. AI-Refeai, T.; Al-Suhaibani, A. Prediction of CBR Using Dynamic Cone Penetrometer. *J. King Saud Univ.-Eng. Sci.* **1997**, *9*, 191–203.
18. Feleke, G.G.; Araya, A.A. Prediction of CBR using DCP for Local Subgrade Materials. In Proceedings of the 1st International Conference on Transportation and Road Research, Mombasa, Kenya, 15–17 March 2016.
19. Wilches, F.J.; Feria-Díaz, J.J.; Hernandez Ávila, J.R. Correlation between California Bearing Ratio (CBR) and Dynamic Cone Penetrometer (DCP) for soil from Sincelejo city in Colombia. *Int. J. Appl. Eng. Res.* **2018**, *13*, 2068–2071.
20. Harison, J.A. Correlation Between California Bearing Ratio and Dynamic Cone Penetrometer Strength Measurement of Soils. *Proc. Inst. Civ. Eng.* **1987**, *83*, 833–844. [CrossRef]
21. Livneh, M. Validation of Correlations Between a Number of Penetration Test and in Situ California Bearing Ratio Tests. *Transp. Res. Rec.* **1989**, *1219*, 56–67.
22. US Army Corps of Engineers. Available online: https://www.kesslerdcp.com/images/phocadownload/PDF-Documents/USACE%20Report%20GL-92-3%20on%20DCP.pdf (accessed on 12 February 2024).
23. Soil Property Testing Limited. Available online: https://www.soilpropertytesting.com/Downloads_files/The%20TRL%20Dynamic%20Cone%20Penetrometer%20Test.pdf (accessed on 13 February 2024).
24. Desalegn, Y. Developing Correlation between DCP and CBR for Locally Used Subgrade Materials. Master's Thesis, Addis Ababa University (AAU), Addis Ababa, Ethiopia, 16 July 2018.
25. IDOT (.gov). Available online: https://idot.illinois.gov/content/dam/soi/en/web/idot/documents/transportation-system/research/pavement-technology-advisories/testing-and-data-collection-series/ptat4.pdf (accessed on 12 February 2024).
26. Lee, J.S.; Kim, S.Y.; Hong, W.T.; Byun, Y.H. Assessing Subgrade Strength Using an Instrumented Dynamic Cone Penetrometer. *Soils Found.* **2019**, *59*, 930–941. [CrossRef]
27. Amadi, A.A.; Sadiku, S.; Abdullahi, M.; Danyaya, H.A. Case study of construction quality control monitoring and strength evaluation of a lateritic pavement using the dynamic cone penetrometer. *Int. J. Pavement Res. Technol.* **2018**, *11*, 530–539. [CrossRef]
28. Salgado, R.; Yoon, S.; Hernandez Ávila, J.R. Dynamic Cone Penetration Test (DCPT) for Subgrade Assessment. Publication FHWA/IN/JTRP-2002/30. Joint Transportation Research Program, Indiana Department of Transportation and Purdue University, West Lafayette, Indiana, 2003. [CrossRef]
29. Kaewhanam, N.; Juntasan, P.; Narong, S. Evaluation of Highway Subgrade Compaction by Dynamic Cone Penetrometer. In Proceedings of the Fifth International Conference on Science, Technology and Innovation for Sustainable Well-Being, Luang Prabang, Lao PDR, 4–6 September 2013.
30. Lakshmi, S.M.; Gani, M.A.; Kamalesh, V.; Mahalakshmi, V.; Padmesh, P.M. Correlating unsoaked CBR with UCC strength for SC and SP soil. *Mater. Today Proc.* **2021**, *43*, 1293–1303. [CrossRef]
31. Livneh, M. In-situ CBR testing by indirect methods. In Proceedings of the 12th International Conference on Soil Mechanics and Foundation Engineering, Rio De Janeiro, Brazil, 13–18 August 1989.
32. Livneh, M.; Ishai, I. Prediction of CBR Values Under Covered Areas. In Proceedings of the 2nd Australia—New Zealand Conference on Geomechanics, Brisbane, Australia, 21–25 July 1975.
33. Shahien, M.M.; Farouk, A. Estimation of deformation modulus of gravelly soils using dynamic cone penetration tests. *Ain Shams Eng. J.* **2013**, *4*, 633–640. [CrossRef]
34. Benz-Navarrete, M.A.; Breul, P.; Gourvès, R. Application of wave equation theory to improve dynamic cone penetration test for shallow soil characterisation. *J. Rock Mech. Geotech. Eng.* **2022**, *14*, 289–302. [CrossRef]
35. George, V.; Rao, N.C.; Shivashankar, R. PFWD, DCP and CBR correlations for evaluation of lateritic subgrades. *Int. J. Pavement Eng.* **2009**, *10*, 189–199. [CrossRef]

36. Taskiran, T. Prediction of California bearing ratio (CBR) of fine grained soils by AI methods. *Adv. Eng. Softw.* **2010**, *41*, 886–892. [CrossRef]
37. Sabat, A.K. Prediction of california bearing ratio of a soil stabilized with lime and quarry dust using artificial neural network. *Electron. J. Geotech. Eng.* **2013**, *18*, 3261–3272.
38. Roy, T.K.; Kuity, A.; Roy, S.K. Prediction of soaked CBR for subgrade layer by using artificial neutral network model. In Proceedings of the International Symposium on Engineering under Uncertainty: Safety Assessment and Management, Kolkata, India, 4 January 2013.
39. Bhatt, S.; Jain, P.K.; Pradesh, M. Prediction of California bearing ratio of soils using artificial neural network. *Am. Int. J. Res. Sci. Technol. Eng. Math.* **2014**, *8*, 156–161.
40. Erzin, Y.; Turkoz, D. Use of neural networks for the prediction of the CBR value of some Aegean sands. *Neural Comput. Appl.* **2016**, *27*, 1415–1426. [CrossRef]
41. Taha, S.; Gabr, A.; El-Badawy, S. Regression and neural network models for California bearing ratio prediction of typical granular materials in Egypt. *Arab. J. Sci. Eng.* **2019**, *44*, 8691–8705. [CrossRef]
42. Bardhan, A.; Samui, P.; Ghosh, K.; Gandomi, A.H.; Bhattacharyya, S. ELM-based adaptive neuro swarm intelligence techniques for predicting the California bearing ratio of soils in soaked conditions. *Appl. Soft Comput.* **2010**, *110*, 107595. [CrossRef]

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.