

Supporting Information

Electro-oxidation of CO Saturated in 0.1 M HClO₄ on Basal and Stepped Pt Single-Crystal Electrodes at Room Temperature Accompanied by Surface Reconstruction

Kiyotaka Abe ^{1,‡}, Hiroyuki Uchida ^{1,*} and Junji Inukai ^{1,*}

¹ Clean Energy Research Center, University of Yamanashi; jinukai@yamanashi.ac.jp

[‡] Present Affiliation: PANASONIC CORPORATION; abe.kiyotaka@jp.panasonic.com

* Correspondence: h-uchida@yamanashi.ac.jp (H.U.); jinukai@yamanashi.ac.jp (J.I.); Tel.: (+81-55-220-8185 (J.I.))

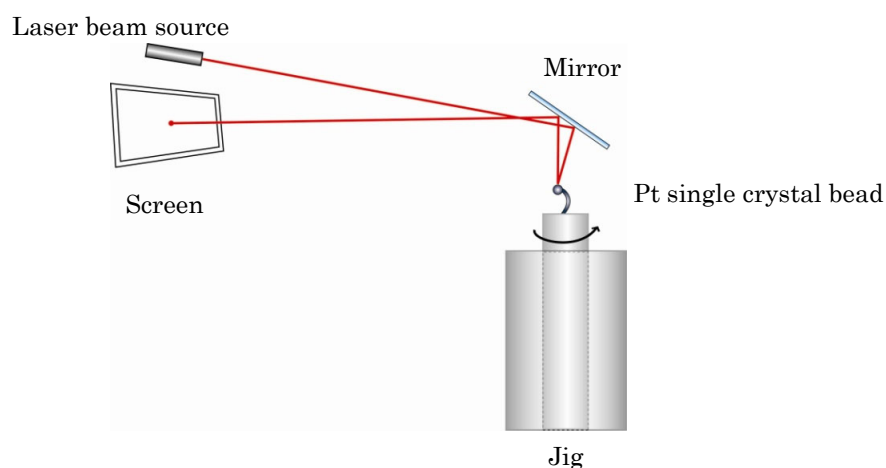


Figure S1 Schematic illustration of the adjustment of (111) and (100) facets by a laser beam reflection method

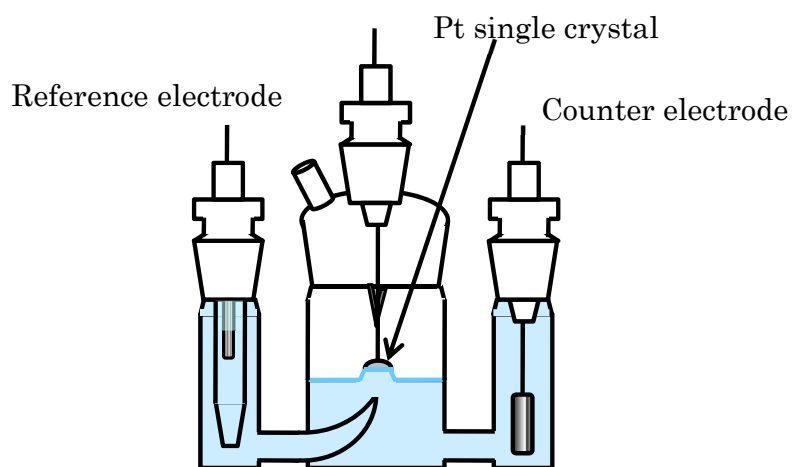


Figure S2 Schematic illustration of a three-compartment cell. The electrochemical measurements were carried out with the hanging meniscus method.