

Supplementary Materials: Quantitative and Qualitative Analysis of Surface Modified Cellulose Utilizing TGA-MS

Daniel Loof, Matthias Hiller, Hartmut Oschkinat and Katharina Koschek

1. Thermogravimetric Analyses of All Silane Modified Cellulose Samples

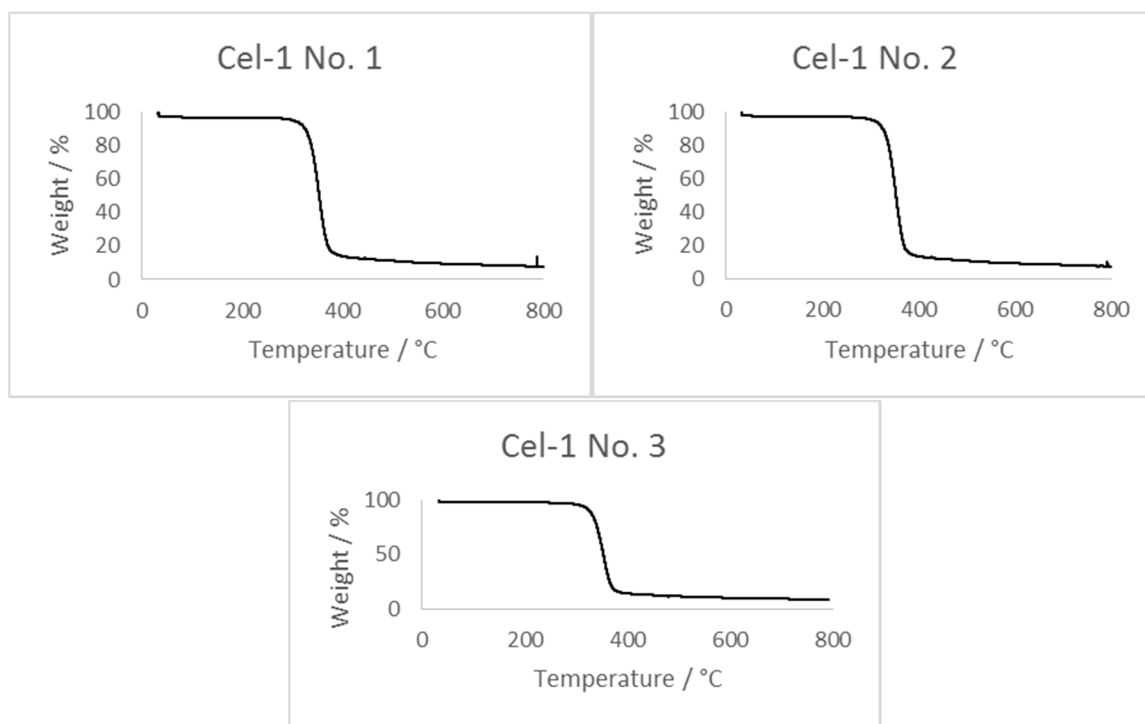


Figure S1. TGA measurements of Cel-1 with $n = 3$.

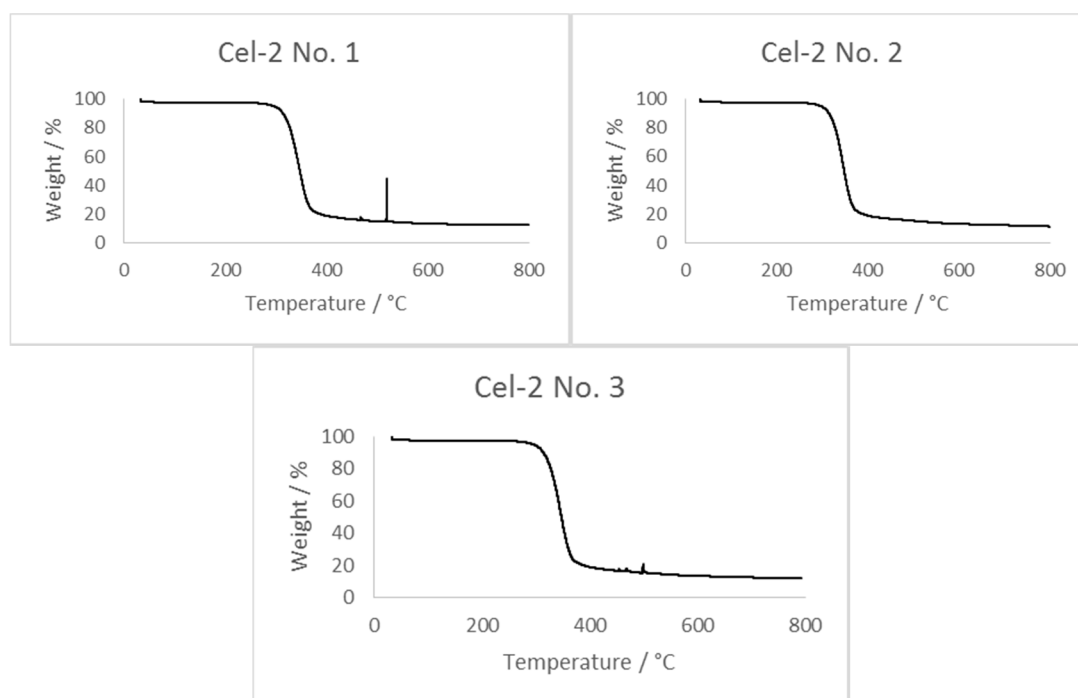


Figure S2. TGA measurements of Cel-2 with $n = 3$.

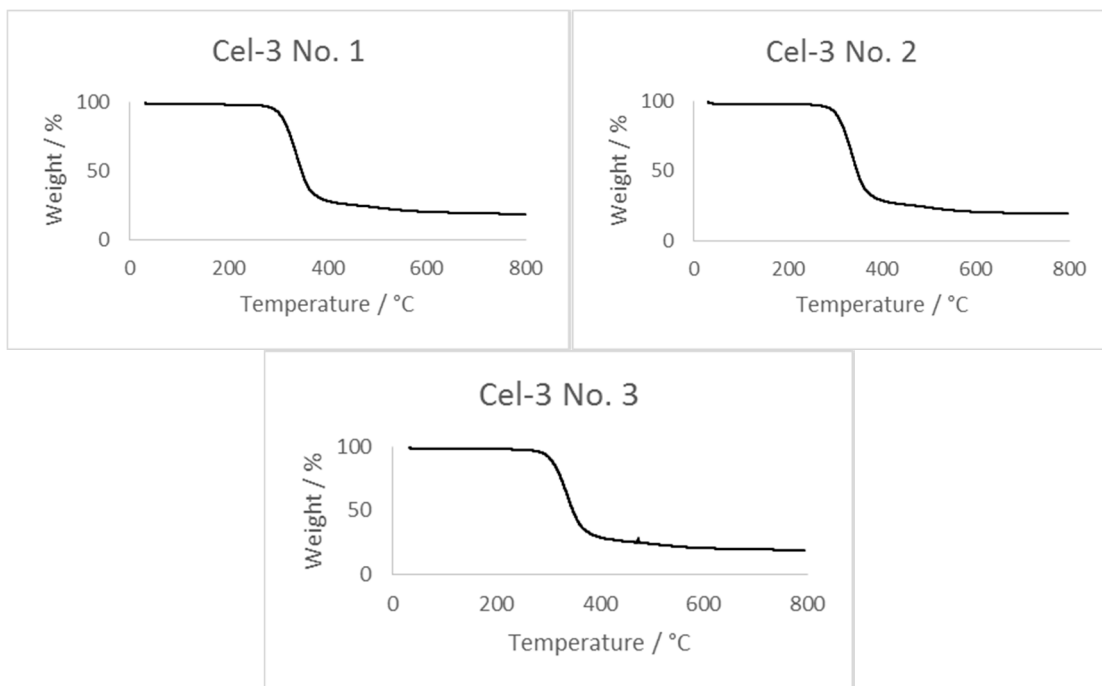


Figure S3. TGA measurement Cel-3 with $n = 3$.

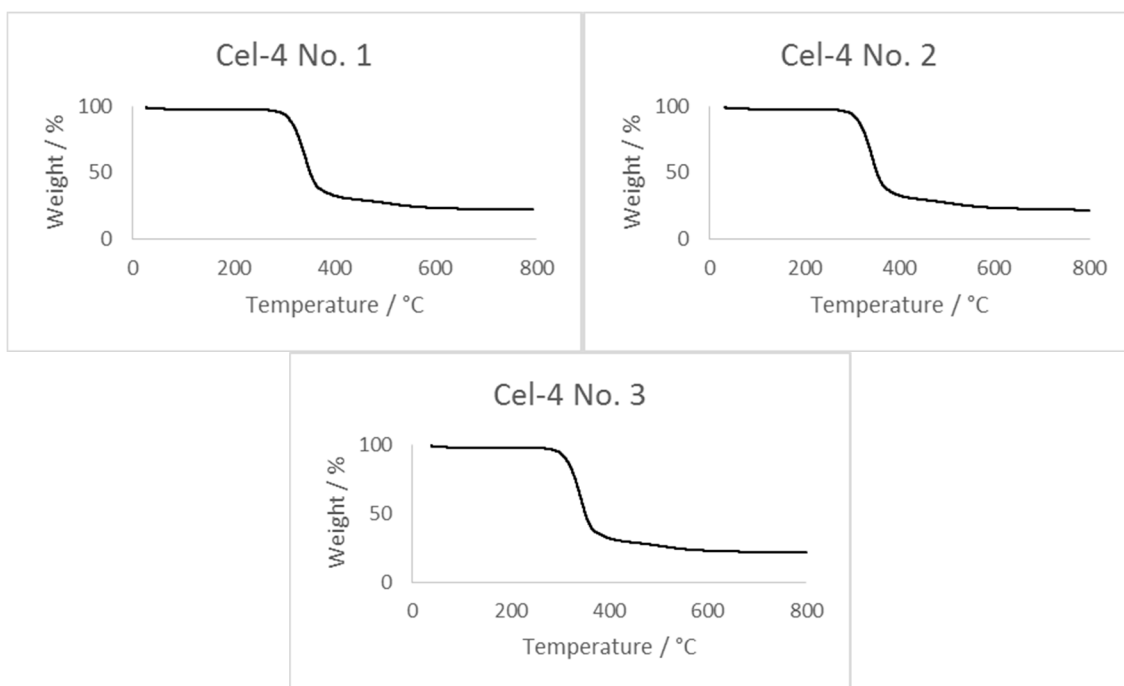


Figure S4. TGA measurement of Cel-4 with $n = 3$.

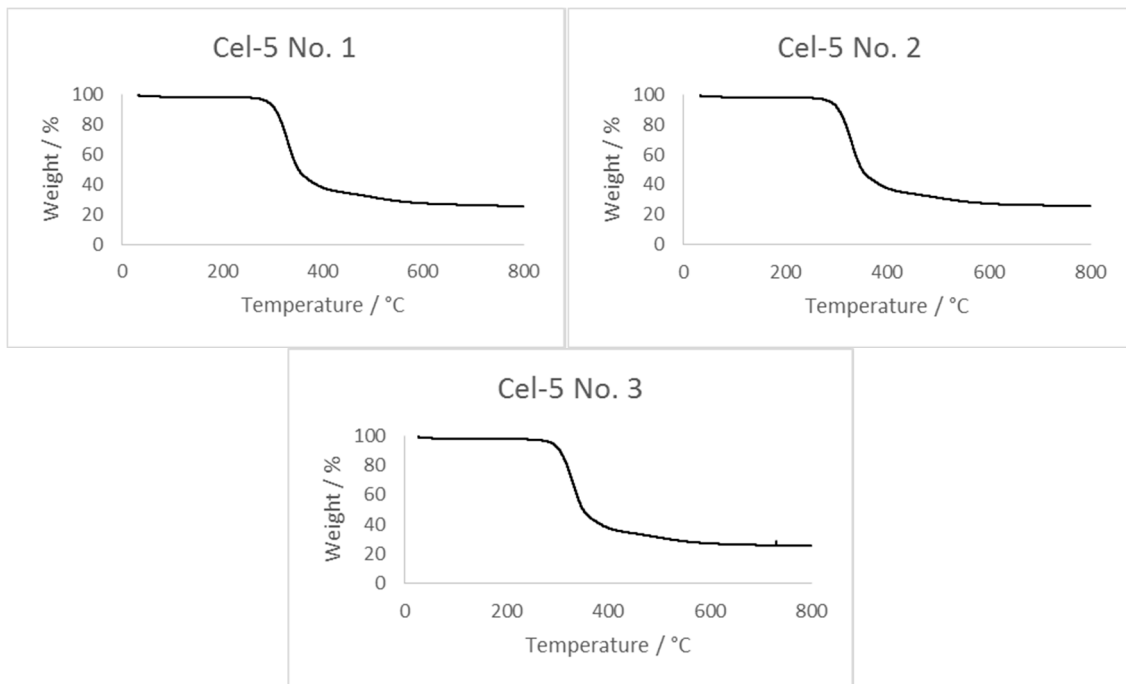


Figure S5. TGA measurement of Cel-5 with $n = 3$.

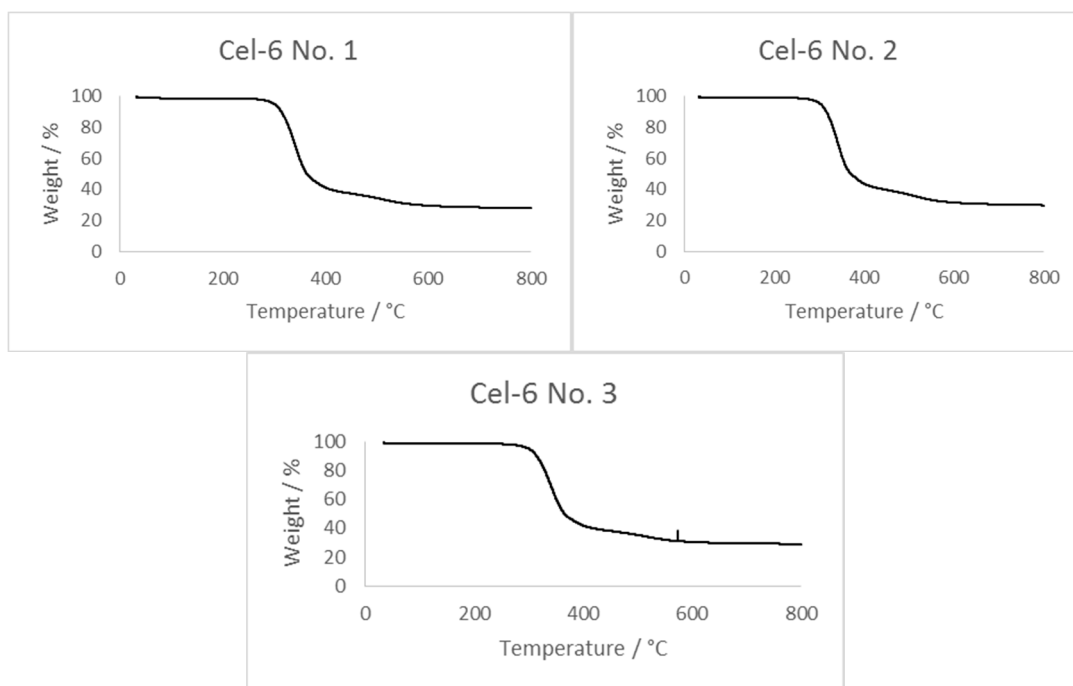


Figure S6. TGA measurement of Cel-6 with $n = 3$.

2. FT-IR and Elemental Analyses

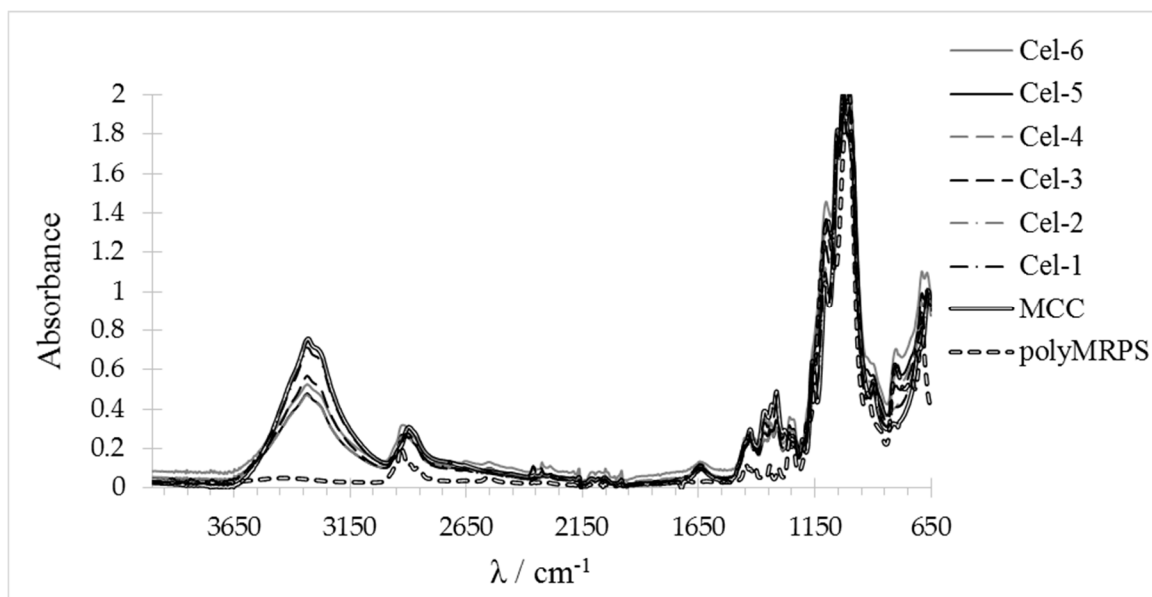


Figure S7. Overview FT-IR spectrum of the references MCC and polyMRPS and silane modified samples Cel-1 to Cel-6.

Table S1. Elemental Analysis Values.

	M/g mol ⁻¹	Cel-1	Cel-2	Cel-3	Cel-4	
C	12.0107	39.39	37.92	36.4	35.57	wt %
H	1.00794	6.46	6.4	6.31	6.14	wt %
O	15.9994	48.4	43.5	41.9	38.3	wt %
S	32.065	2.66	4.7	6.87	8.68	wt %
Si	28.0855	2.08	4.12	6.01	7.54	wt %
Σ		98.99	96.64	97.49	96.23	wt %
S	32.065	0.830	1.466	2.143	2.707	mmol/g
Si	28.0855	0.741	1.467	2.140	2.685	mmol/g
Σ(Si + S)/2		0.785	1.466	2.141	2.696	mmol/g